

→ Series 410



■ SUITABLE FOR

|                        |         |  |
|------------------------|---------|--|
| Air, gases and vapours | neutral |  |
|------------------------|---------|--|

■ EXAMPLES OF USE

For the protection of:  
- pressure tanks and  
- pressure systems  
for air and other neutral, non-poisonous and non-flammable gases which can be freely discharged into the environment. Please observe plant-specific regulations and use of appropriate valve version and sealing material.

- pneumatic control units
- pressure booster plants air-side
- waste water treatment plants
- transport- and railway applications
- pneumatic braking systems
- secondary areas in the food-, pharmaceutical- and cosmetics- industries

**Safety valves are set and sealed at the factory.**

■ APPROVALS

|                                 |           |
|---------------------------------|-----------|
| TÜV Type test approval 2055     | D/G       |
| ASME                            | G         |
| EC type examination             | S/G       |
| TSG ZF001-2006                  | D/G (S/G) |
| KGS                             | G         |
| TR ZU 032/2013 - TR ZU 010/2011 | D/G (S/G) |

| Requirements   |  |
|--|--|
| AD 2000 Data sheet A2<br>DIN EN ISO 4126-1<br>PED 2014/68/EU | ASME-Code Sec. VIII Div. 1<br>KGS AA 319 |

| Classification society                |         |
|---------------------------------------|---------|
| Germanischer Lloyd                    | GL      |
| Lloyd's Register EMEA                 | LR EMEA |
| Bureau Veritas                        | BV      |
| American Bureau of Shipping           | ABS     |
| Det Norske Veritas                    | DNV     |
| Russian Maritime Register of Shipping | RS      |



■ MATERIAL



■ SPECIFICATION



1/4" – 1"



– 60°C to + 225°C  
depending on version



0,2 – 50 bar

■ MATERIALS

| Component      | Material        | DIN EN | ASME  |
|----------------|-----------------|--------|-------|
| Inlet body     | Stainless steel | 1.4404 | 316 L |
| Outlet body    | Stainless steel | 1.4404 | 316 L |
| Internal parts | Stainless steel | 1.4404 | 316 L |
| Spring         | Stainless steel | 1.4568 | 631   |

|          |          |  |
|----------|----------|--|
| <b>s</b> | Standard | cylindrical form, atmospheric discharge, for air and similar neutral, non-toxic and non-flammable gases that can be freely discharged into the atmosphere. |
|----------|----------|--|

## ■ MEDIUM

|          |         |                               |
|----------|---------|-------------------------------|
| <b>G</b> | gaseous | Air and similar neutral gases |
|----------|---------|-------------------------------|

## ■ TYPE OF LIFTING MECHANISM

|          |  |  |
|----------|--|--|
| <b>K</b> | Standard with twist-type lifting mechanism |  |
|----------|--|--|

## ■ AVAILABLE NOMINAL DIAMETERS AND CONNECTION SIZES

| Nominal diameter DN                        | 8        | 10        | 15        | 20        | 25      |
|--|----------|-----------|-----------|-----------|---------|
| Inlet                                      | 1/4" (8) | 3/8" (10) | 1/2" (15) | 3/4" (20) | 1" (25) |
| Atmospheric discharge via outlet apertures | ■        | ■         | ■         | ■         | ■       |

## ■ TYPE OF CONNECTION INLET / OUTLET THREADED CONNECTIONS

|              |          |                       |                      |
|--------------|----------|-----------------------|----------------------|
| <b>m / -</b> | Standard | Male thread BSP-P / - | DIN EN ISO 228-1 / - |
|--------------|----------|-----------------------|----------------------|

## ■ SEALS

|                          |                         |                                   |                 |
|--------------------------|-------------------------|-----------------------------------|-----------------|
| <b>FKM</b>               | Fluorocarbon            | Elastomere flat seal 0,2 – 25 bar | -20°C to +200°C |
| <b>PTFE</b>              | Polytetrafluoroethylene | Flat seal 25,1 – 50 bar           | -60°C to +225°C |
| <b>On request</b>        |                         |                                   |                 |
| <b>NBR</b>               | Nitrile rubber          | Elastomere flat seal 0,2 – 25 bar | -30°C to +130°C |
| <b>Against surcharge</b> |                         |                                   |                 |
| <b>PTFE</b>              | Polytetrafluoroethylene | Flat seal 0,2 – 25 bar            | -60°C to +225°C |


## ■ OPTIONS

|                              |
|------------------------------|
| Special versions on request. |
|------------------------------|

■ NOMINAL DIAMETERS, CONNECTIONS, INSTALLATION DIMENSIONS

| Series 410: Connection, installation dimensions, ranges of adjustment |     |          |           |           |           |         |        |         |        |
|---|-----|----------|-----------|-----------|-----------|---------|--------|---------|--------|
| Nominal diameter  | DN  | 8        | 10        | 15        | 20        | 25      |        |         |        |
| Connection DIN EN ISO 228   | G   | 1/4" (8) | 3/8" (10) | 1/2" (15) | 3/4" (20) | 1" (25) |        |         |        |
| Installation dimensions in mm   | H   | 60       | 65        | 78        | 66        | 79      | 94     | 104     | 111    |
|   | h   | 10       | 10        | 10        | 12        | 12      | 12     | 12      | 14     |
|   | SW  | 19       | 24        | 24        | 27        | 27      | 36     | 36      | 41     |
|   | do  | 7,5      | 10        | 10        | 11        | 11      | 16     | 16      | 20     |
| Weight  | kg  | 0,1      | 0,14      | 0,16      | 0,17      | 0,19    | 0,35   | 0,4     | 0,6    |
| Range of adjustment   | bar | 0,2-50   | 0,2-9     | 9,1-50    | 0,2-7     | 7,1-50  | 0,2-9  | 9,1-50  | 0,2-50 |
| Range of adjustment ASME  | psi | 15-725   | 15-130    | 131-725   | 15-102    | 103-725 | 15-130 | 131-725 | 15-725 |

■ MAIN DIMENSIONS, INSTALLATION DIMENSIONS

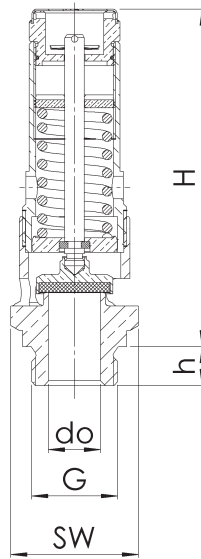

■ INDIVIDUAL SELECTION / VALVE CONFIGURATION

| Series | Valve version | Medium | Lifting device | Nominal diameter DN | Connection type |        | Connection size |        | Seal | Options | Set pressure | Quantity |
|--------|---------------|--------|----------------|---------------------|-----------------|--------|-----------------|--------|------|---------|--------------|----------|
|        |               |        |                |                     | Inlet           | Outlet | Inlet           | Outlet |      |         |              |          |
| 410    | s             | G      | K              | 8                   | m               | -      | 8               | -      | FKM  |         | 10,0         | 5        |
| 410    | s             | G      | K              |                     | m               | -      |                 | -      |      |         |              |          |
| 410    | s             | G      | K              |                     | m               | -      |                 | -      |      |         |              |          |
| 410    | s             | G      | K              |                     | m               | -      |                 | -      |      |         |              |          |

In this table you can configure a valve according to your individual requirements (similar to the *example* shown, which should be deleted before you enter your own data). Please complete the table by hand using the abbreviations in this datasheet and then fax it to our sales team can contact you.

Name \_\_\_\_\_

First Name \_\_\_\_\_

Company \_\_\_\_\_

Telephone \_\_\_\_\_

E-Mail \_\_\_\_\_

■ CAPACITY TABLE

| Series 410: Blowing-off rates at 10% above set pressure |      |      |      |      |      |      |
|---|------|------|------|------|------|------|
| Nominal diameter DN                                     |      | 8    | 10   | 15   | 20   | 25   |
| Set pressure bar  |      |      |      |      |      |      |
| Air<br>Nm <sup>3</sup> /h                               | 0,2  | 20   | 35   | 46   | 100  | 133  |
|   | 0,3  | 25   | 45   | 54   | 119  | 144  |
|   | 0,4  | 29   | 52   | 67   | 137  | 167  |
|   | 0,5  | 32   | 58   | 74   | 158  | 185  |
|   | 0,6  | 35   | 64   | 82   | 172  | 211  |
|   | 0,7  | 37   | 70   | 87   | 187  | 235  |
|   | 0,8  | 41   | 74   | 95   | 200  | 260  |
|   | 0,9  | 43   | 80   | 101  | 213  | 282  |
|   | 1    | 46   | 85   | 107  | 227  | 305  |
|   | 1,5  | 60   | 108  | 137  | 286  | 408  |
|   | 2    | 73   | 132  | 166  | 346  | 506  |
|   | 3    | 100  | 182  | 222  | 465  | 699  |
|   | 4    | 125  | 228  | 279  | 584  | 889  |
|   | 5    | 151  | 274  | 336  | 703  | 1070 |
|   | 6    | 176  | 321  | 393  | 821  | 1251 |
|   | 7    | 201  | 367  | 450  | 940  | 1432 |
|   | 8    | 227  | 414  | 507  | 1059 | 1613 |
|   | 9    | 252  | 460  | 564  | 1178 | 1794 |
|   | 10   | 278  | 507  | 621  | 1297 | 1975 |
|   | 11   | 303  | 553  | 678  | 1416 | 2156 |
|   | 12   | 329  | 599  | 735  | 1535 | 2337 |
|   | 13   | 354  | 646  | 791  | 1654 | 2518 |
|   | 14   | 380  | 692  | 848  | 1773 | 2700 |
|   | 15   | 405  | 739  | 905  | 1891 | 2881 |
|   | 16   | 431  | 785  | 962  | 2010 | 3062 |
|   | 17   | 456  | 832  | 1019 | 2129 | 3243 |
|   | 18   | 482  | 878  | 1076 | 2248 | 3424 |
|   | 19   | 507  | 925  | 1133 | 2367 | 3605 |
|   | 20   | 533  | 971  | 1190 | 2486 | 3786 |
|   | 21   | 558  | 1017 | 1247 | 2605 | 3967 |
|   | 22   | 584  | 1064 | 1304 | 2724 | 4148 |
|   | 23   | 609  | 1110 | 1361 | 2843 | 4329 |
| 24  | 635  | 1157 | 1417 | 2961 | 4510 |      |
| 25  | 660  | 1203 | 1474 | 3080 | 4691 |      |
| 26  | 685  | 1250 | 1531 | 3199 | 4872 |      |
| 27  | 711  | 1296 | 1588 | 3318 | 5053 |      |
| 28  | 736  | 1342 | 1645 | 3437 | 5234 |      |
| 29  | 762  | 1389 | 1702 | 3556 | 5415 |      |
| 30  | 787  | 1435 | 1759 | 3675 | 5597 |      |
| 31  | 813  | 1482 | 1816 | 3794 | 5778 |      |
| 32  | 838  | 1528 | 1873 | 3913 | 5959 |      |
| 33  | 864  | 1575 | 1930 | 4031 | 6140 |      |
| 34  | 889  | 1621 | 1986 | 4150 | 6321 |      |
| 35  | 915  | 1667 | 2043 | 4269 | 6502 |      |
| 36  | 940  | 1714 | 2100 | 4388 | 6683 |      |
| 37  | 966  | 1760 | 2157 | 4507 | 6864 |      |
| 38  | 991  | 1807 | 2214 | 4626 | 7045 |      |
| 39  | 1017 | 1853 | 2271 | 4745 | 7226 |      |
| 40  | 1042 | 1900 | 2328 | 4864 | 7407 |      |
| 41  | 1068 | 1946 | 2385 | 4983 | 7588 |      |
| 42  | 1093 | 1993 | 2442 | 5101 | 7769 |      |
| 43  | 1119 | 2039 | 2499 | 5220 | 7950 |      |
| 44  | 1144 | 2085 | 2556 | 5339 | 8131 |      |
| 45  | 1170 | 2132 | 2612 | 5458 | 8313 |      |
| 46  | 1195 | 2178 | 2669 | 5577 | 8494 |      |
| 47  | 1220 | 2225 | 2726 | 5696 | 8675 |      |
| 48  | 1246 | 2271 | 2783 | 5815 | 8856 |      |
| 49  | 1271 | 2318 | 2840 | 5934 | 9037 |      |
| 50  | 1297 | 2364 | 2897 | 6053 | 9218 |      |

■ CAPACITY TABLE ASME

| Series 410: Blowing-off rates at 10% above set pressure |     |      |      |      |      |      |
|---|-----|------|------|------|------|------|
| Nominal diameter DN                                     |     | 8    | 10   | 15   | 20   | 25   |
| Set pressure bar psi(g)                                 |     |      |      |      |      |      |
| Air<br>SCFM   | 15  | 31   | 55   | 67   | 142  | 221  |
|   | 30  | 45   | 81   | 98   | 207  | 323  |
|   | 40  | 56   | 99   | 120  | 254  | 397  |
|   | 50  | 66   | 118  | 143  | 302  | 472  |
|   | 60  | 77   | 137  | 165  | 350  | 546  |
|   | 70  | 87   | 155  | 188  | 397  | 621  |
|   | 87  | 105  | 187  | 226  | 478  | 747  |
|   | 90  | 108  | 192  | 233  | 493  | 770  |
|   | 100 | 119  | 211  | 255  | 540  | 844  |
|   | 110 | 129  | 230  | 278  | 588  | 919  |
|   | 120 | 140  | 248  | 300  | 636  | 993  |
|   | 130 | 150  | 267  | 323  | 683  | 1068 |
|   | 140 | 161  | 286  | 345  | 731  | 1142 |
|   | 150 | 171  | 304  | 368  | 779  | 1217 |
|   | 160 | 182  | 323  | 391  | 826  | 1291 |
|   | 170 | 192  | 341  | 413  | 874  | 1366 |
|   | 180 | 203  | 360  | 436  | 922  | 1440 |
|   | 190 | 213  | 379  | 458  | 969  | 1515 |
|   | 200 | 223  | 397  | 481  | 1017 | 1589 |
|   | 210 | 234  | 416  | 503  | 1065 | 1663 |
|   | 220 | 244  | 434  | 526  | 1112 | 1738 |
|   | 230 | 255  | 453  | 548  | 1160 | 1812 |
|   | 240 | 265  | 472  | 571  | 1208 | 1887 |
|   | 250 | 276  | 490  | 593  | 1255 | 1961 |
|   | 260 | 286  | 509  | 616  | 1303 | 2036 |
|   | 270 | 297  | 528  | 638  | 1351 | 2110 |
|   | 280 | 307  | 546  | 661  | 1398 | 2185 |
|   | 290 | 318  | 565  | 683  | 1446 | 2259 |
|   | 300 | 328  | 583  | 706  | 1494 | 2334 |
|   | 320 | 349  | 621  | 751  | 1589 | 2483 |
|   | 340 | 370  | 658  | 796  | 1684 | 2632 |
|   | 360 | 391  | 695  | 841  | 1780 | 2781 |
| 380   | 412 | 732  | 886  | 1875 | 2929 |      |
| 400   | 433 | 770  | 931  | 1970 | 3078 |      |
| 420   | 454 | 807  | 976  | 2066 | 3227 |      |
| 440   | 475 | 844  | 1021 | 2161 | 3376 |      |
| 460   | 496 | 881  | 1066 | 2256 | 3525 |      |
| 480   | 517 | 919  | 1111 | 2351 | 3674 |      |
| 500   | 538 | 956  | 1157 | 2447 | 3823 |      |
| 520   | 559 | 993  | 1202 | 2542 | 3972 |      |
| 540   | 580 | 1030 | 1247 | 2637 | 4121 |      |
| 560   | 600 | 1067 | 1292 | 2733 | 4270 |      |
| 580   | 621 | 1105 | 1337 | 2828 | 4419 |      |
| 600   | 642 | 1142 | 1382 | 2923 | 4568 |      |
| 620   | 663 | 1179 | 1427 | 3019 | 4717 |      |
| 640   | 684 | 1216 | 1472 | 3114 | 4866 |      |
| 660   | 705 | 1254 | 1517 | 3209 | 5015 |      |
| 680   | 726 | 1291 | 1562 | 3305 | 5164 |      |
| 700   | 747 | 1328 | 1607 | 3400 | 5313 |      |
| 725   | 773 | 1375 | 1663 | 3519 | 5499 |      |