

→ Type 625

Type 625

Air inlet valve made of brass,
weight-loaded

■ SUITABLE FOR

Air, gases and vapours

neutral



■ EXAMPLES OF USE

For the protection of pressureless tanks and piping systems to avoid vacuum during discharging or cooling-down. These vacuum valves are also called „sniffing valves“. They open in case of a vacuum and release the air until the vacuum has been alleviated.

- emptying of tanks



■ MATERIAL



■ SPECIFICATION



3/8" – 1/2"




from –10°C
to + 225°C



pressure-
less

■ NOMINAL DIAMETERS, CONNECTIONS, INSTALLATION DIMENSIONS

Type 625: Connection, Installation dimensions, Weight			
Nominal diameter	DN	15	
Connection DIN EN ISO 228	G	1/2" (15)	
Installation dimensions in mm	L	48	
	h	13	
	SW	27	
Weight	kg	0,06	

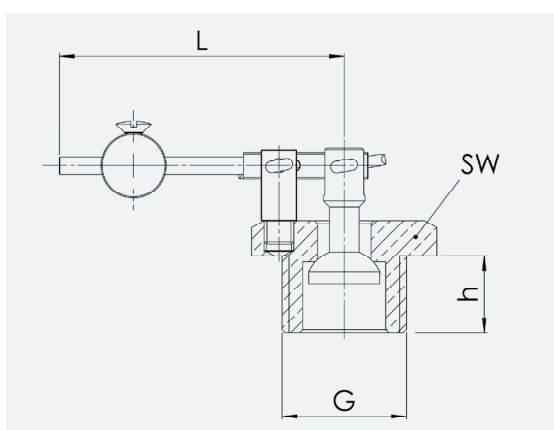

■ MATERIALS

Component	Material	DIN EN	ASME
Body	Brass	CW617N	CW617N
Internal parts	Brass	CW617N	CW617N
Seal	Brass	CW617N	CW617N